

### Key Features

- Omni-directional
- Line-level device

### Product Description

The EXAM.100 microphone was designed with the highest quality and performance in the minimum dimensions allowable for demanding applications such as covert surveillance and hospitals. The unit is a stand-alone module that can be installed in any location for optimum operation.

All microphone modules installed with cameras in selected Extreme products are equipped with a voltage regulating board (VRB) for 12/24V DC/AC operation.


### Specifications

<b>Model</b>	<b>EXAM.100</b>
Frequency Response	20 Hz – 10 kHz
Sensitivity	68 dB +/- 3 dB
Maximum Sound Pressure	90 dB
Power Requirements	18 mW @ 12 VDC
Output Impedance	3.2V p-p / 750 ohm
Output Connector	leads
Dimensions	7 mm x 25 mm
Weight	1 gram

### Factory Installed to Camera Models

<a href="#">EX35</a>	Optional
<a href="#">EX36</a>	Optional
<a href="#">EX37</a>	Optional

### Product Image

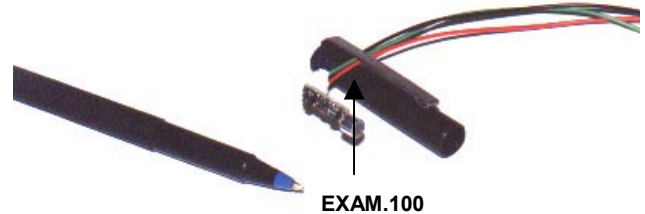

Dealer / Distributor
----------------------

